Product Description: 15 inch TFT-LCD PANEL			
AUO Model Name: T150XG01 V3			
Customer Part No/Project Name:			
Customer Signature	**Date**	AUO	**Date**
		Approved By: PL Chen	
		Prepared By: CJ Tan 12/1 2006	

PDF created with FinePrint pdfFactory Pro trial version www.pdffactory.com

Document Version: 1.0

Date:2006/12/1

Product Functional Specification

15" Color TFT-LCD Module
Model Name: T150XG01 V3
(QDI Model: QD15XL1601)

() Preliminary Specification
(*) Final Specification

PDF created with FinePrint pdfFactory Pro trial version www.pdffactory.com
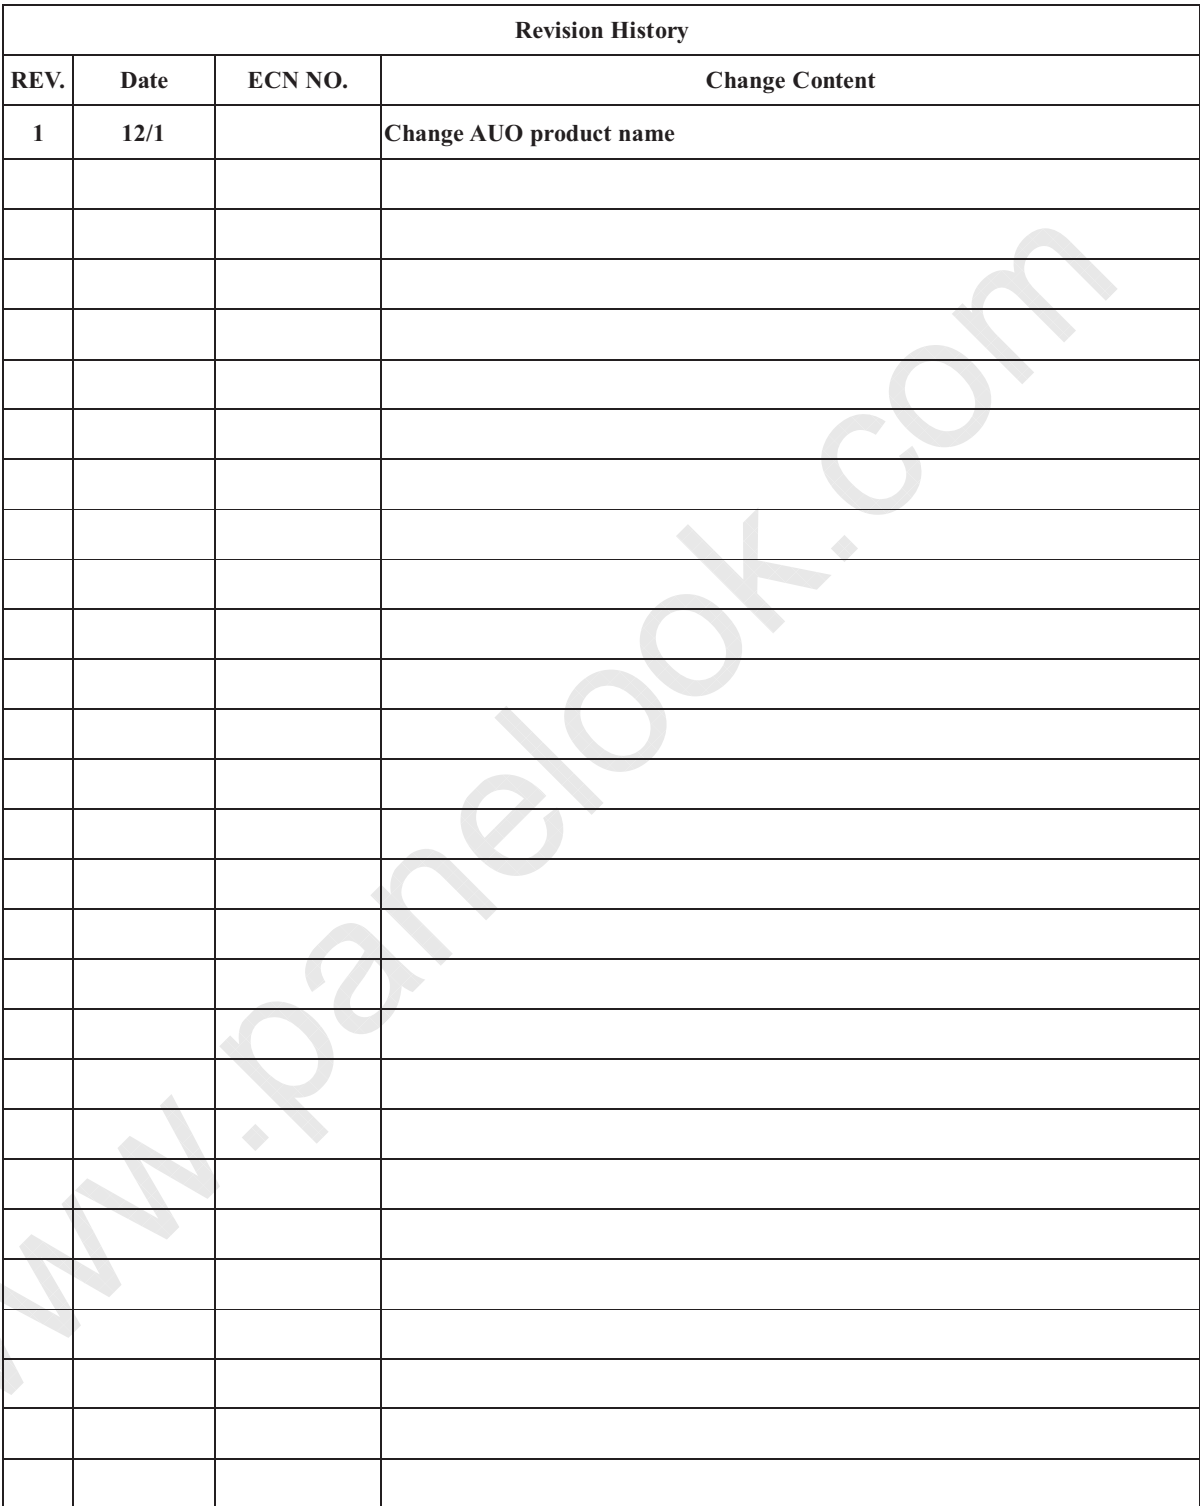
This specification sheet is for model name change, since AUO merged QDI from 2006/10/1

This Specification Sheet keep the original QDI Model name and Spec.

New Model name and old model name comparison table as following:

	AUO	QDI
Model Name	T150XG01 V3	QD15XL1601
Change Item	1. Carton Printing format 2. Product Serial label format	

©Copyright AU Optronics, Inc.
Sep, 2006 All Rights Reserved.
No Reproduction and Redistribution Allowed

PDF created with FinePrint pdfFactory Pro trial version www.pdffactory.com

Revision History			
REV.	Date	ECN NO.	Change Content
1	12/1		**Change AUO product name**

PDF created with FinePrint pdfFactory Pro trial version www.pdffactory.com

Content List

PDF created with FinePrint pdfFactory Pro trial version www.pdffactory.com

1. Application

This specification applies to a color TFT-LCD module, QD15XL16

2. Overview

This module is a color active matrix LCD module incorporating amorphous silicon TFT (Thin Film Transistor). It is composed of a color TFT-LCD panel; driver ICs, control circuit and power supply circuit and a backlight unit. Graphics and texts can be displayed on a 1024×3×768 dots panel with 16.2 million colors by using the LVDS (Low Voltage Differential Signaling) interface, 6-bit+FRC driving method and supplying +5V DC supply voltage for TFT-LCD panel driving.

The TFT-LCD panel used for this module has very high aperture ratio. A low-reflection and higher-color-saturation type color filter is also used for this panel. Therefore, high-brightness and high-contrast image, which is suitable for the LCD TV,HDTV and multimedia use, can be obtained by using this module.

[Features]

- A Color Active Matrix Liquid Crystal Display with an integral Cold Cathode Filament Lamp (CCFL) backlight system.
- TFT as the active element.
- Associated electronics (drivers, control circuits, etc)
- A metal frame

3. General Specifications

Parameter	Specifications	Unit
Display size	380.16 (15.0") Diagonal	mm
Active area	304.128 (H)×228.096 (V)	mm
Pixel format	1024 (H)×768 (V) (1 pixel = R+G+B dots)	Pixel
Pixel pitch	0.297 X 0.297	mm
Pixel configuration	R,G,B vertical stripe	
Display mode	Normally White	
Unit outline dimensions	326.5(W)×253.5 (H)	mm
Thickness	Typ. 15. 4	mm
Weight	1500 max.	g

PDF created with FinePrint pdfFactory Pro trial version www.pdffactory.com

Surface treatment	Hard Coating (3H) & Anti-Glare (26%) treatment of the front polarizer	
Lamp Quantity	4 edge type CCFL	pcs

PDF created with FinePrint pdfFactory Pro trial version www.pdffactory.com

4. Input Terminals

4-1. TFT-LCD panel driving

　　CN1 (LVDS signals and +5V DC power supply)

　　Using connector: DF14H-20P-1.25H (Hirose) or Equivalent

　　LCD Connector: DF14-20S-1.25C(Manufactured by Hirose) or Equivalent

Pin No.	Symbol	Function	Remark
1	VDD	+5V Input	
2	VDD	+5V Input	
3	GND	Power Ground	
4	GND	Power Ground	
5	RxIN0-	Receiver signal (-)	LVDS
6	RxIN0+	Receiver signal (+)	LVDS
7	GND	Ground	
8	RxIN1-	Receiver signal (-)	LVDS
9	RxIN1+	Receiver signal (+)	LVDS
10	GND	Ground	
11	RxIN2-	Receiver signal (-)	LVDS
12	RxIN2+	Receiver signal (+)	LVDS
13	GND	Ground	
14	CLKIN-	Clock signal (-)	LVDS
15	CLKIN+	Clock signal (+)	LVDS
16	GND	Ground	
17	RxIN3-	Receiver signal (-)	LVDS
18	RxIN3+	Receiver signal (+)	LVDS
19	GND	Ground	
20	GND	Ground	

【Note 1】All GND(ground) pins should be connected together.

【Note 2】All V_{DD} (power supply) pins should be connected together.

PDF created with FinePrint pdfFactory Pro trial version www.pdffactory.com

4-2 Interface block diagram
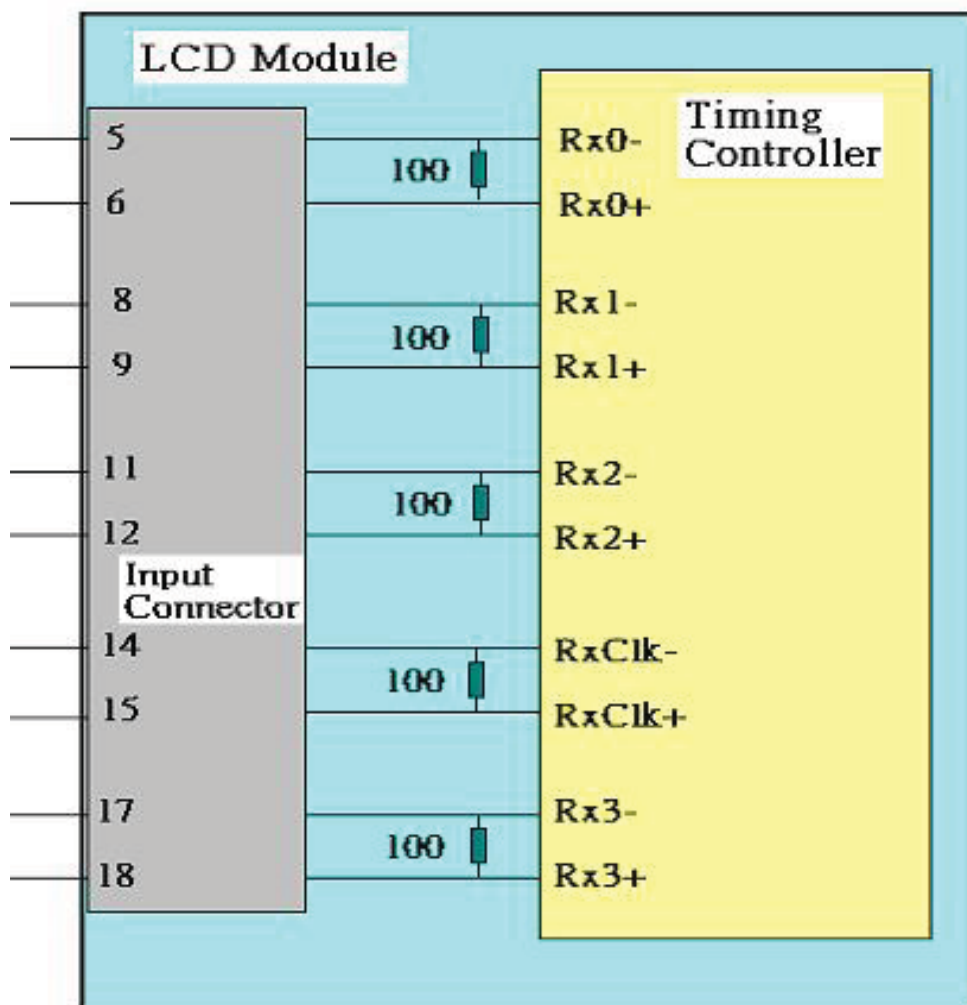
PDF created with FinePrint pdfFactory Pro trial version www.pdffactory.com

4-3. Backlight driving

Pin	Symbol	Description	Notes
1	HV	Power supply for lamp (high)	1) LCD : BHSR-02VS-1 (JST)
2	LV	Power supply for lamp (Low)	2) System : SM02B-BHSS-1 (JST)

PDF created with FinePrint pdfFactory Pro trial version www.pdffactory.com

5.Absolute Maximum Ratings

LCD module

Parameter	Symbol	Condition	Ratings	Unit	Remark
+5V supply voltage	V_{DD}	Ta=25℃	-0.3 ~ 6.0	V	
Storage temperature	Tstg	―	-20 ~ 60	℃	【Note1】
Operating temperature (Ambient)	Topa	―	0 ~ +50	℃	

【Note1】Humidity：90%RH Max. at Ta≦40℃.

Maximum wet-bulb temperature at 39℃ or less at Ta>40℃.

No condensation.

PDF created with FinePrint pdfFactory Pro trial version www.pdffactory.com

6. Electrical Characteristics

6-1.TFT-LCD panel driving

Ta＝25℃

Parameter		Symbol	Min.	Typ.	Max.	Unit	Remark
V_{DD}	Supply voltage	V_{DD}	4.75	5.0	5.25	V	【Note2】
	Current dissipation	I_{DD}	-	430	550	mA	【Note3】
Permissive input ripple voltage		V_{RP}	-	-	100	mV p-p	V_{DD}=+5V
Differential input threshold voltage	High	V_{TH}	-	-	+100	mV	V_{CM}=+1.2V
	Low	V_{TL}	100	-	-	mV	【Note1】
Rush current		I_{RUSH}	-	-	*2*	A	Rise time 200 uS

【Note1】　V_{CM} : Common mode voltage of LVDS driver.
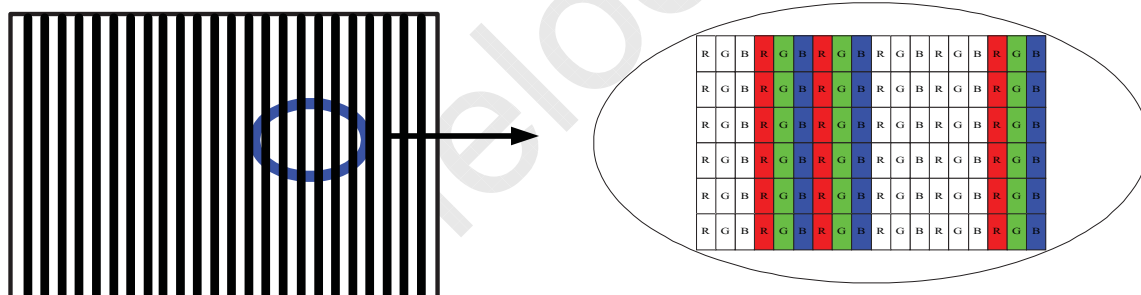
【Note2】

Power On-off sequence
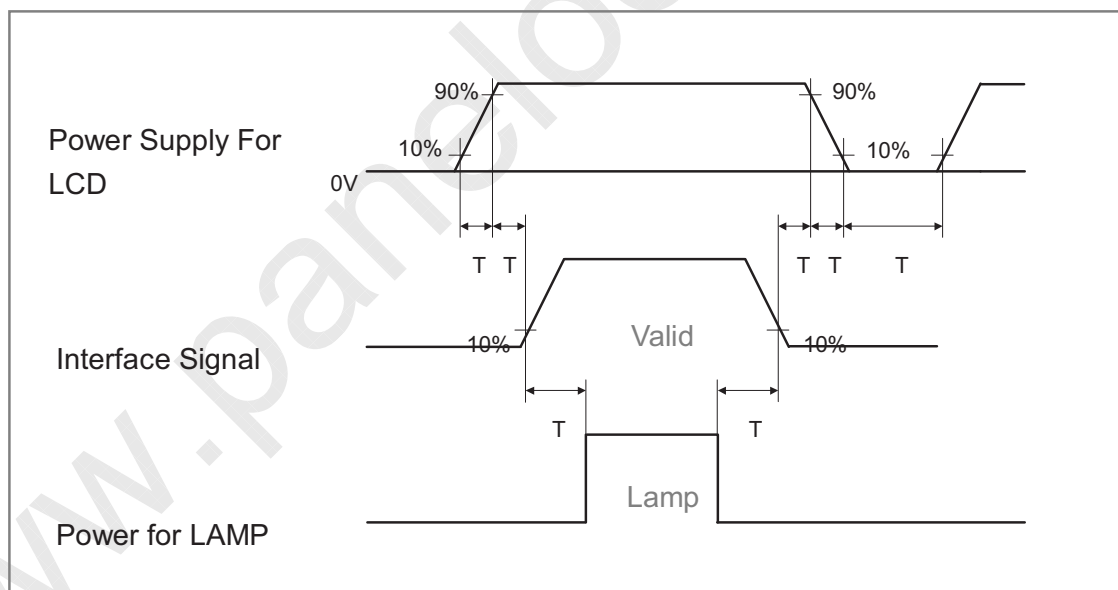
PDF created with FinePrint pdfFactory Pro trial version www.pdffactory.com

|	Min	Max	Units
T1	1	10	ms
T2	0	50	ms
T3	200	-	ms
T4	200	-	ms
T5	0	50	ms
T6	0	10	ms
T7	400	-	ms

【Note3】

Typical current condition; 2-line vertical stripe pattern (0,255GS). V_{DD}=+5V

Maximum current condition; Change to 1x1 dot checker board pattern.

V_{DD}=+5V

□ : 0 GS   ■ : 255 GS

PDF created with FinePrint pdfFactory Pro trial version www.pdffactory.com

6-2. Backlight driving

The backlight system is a edge type with 4 CCFL lamp.

The characteristics of the lamp are shown in the following table.

Parameter	Symbol	Min.	Typ.	Max.	Unit	Remark
Lamp current range	I_L	5.5	6.5	7.0	mArms	【Note1】
Lamp voltage	V_L	-	585	-	Vrms	
Lamp power consumption	P_L	-	15.2	-	W	【Note2】 IL=6.5 mA
Lamp frequency	F_L	40-	60	80-	kHz	【Note3】
Established starting voltage	Vs	-	-	900	Vrms	Ta=25℃
		-	-	1150	Vrms	Ta=0℃ 【Note4】
Lamp life time	L_L	50,000	-		hour	【Note5】
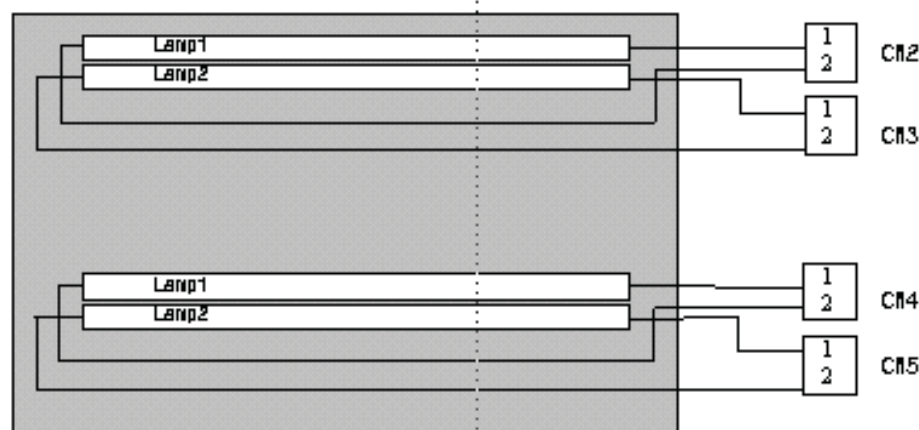
PDF created with FinePrint pdfFactory Pro trial version www.pdffactory.com

【**Note1**】 **Lamp current is measured with current meter for high frequency as shown below.**

【**Note2**】 **Calculated Value for reference ($I_L \times V_L$)**

【**Note3**】 **Lamp frequency may produce interference with horizontal synchronous frequency, and this may cause beat on the display. Therefore lamp frequency shall be detached as much as possible from the horizontal synchronous frequency and from the harmonics of horizontal synchronous to avoid interference.**

【**Note4**】 **The voltage above this value should be applied to the lamp for more than 1 second to start-up. Otherwise the lamp may not be turned on.**

【**Note5**】 **Lamp life time is defined as the time when either ① or ② occurs in the continuous operation under the condition of Ta = 25℃ and I_L =6.5 mArms.**

① Brightness becomes 50 % of the original value under standard condition.

② Kick-off voltage at Ta = 0℃ exceeds maximum value.

【**Note6**】 **The performance of the backlight, for example life time or brightness, is much influenced by the characteristics of the DC-AC inverter for the lamp. When you design or order the inverter, please make sure that a poor lighting caused by the mismatch of the backlight and the inverter (miss-lighting, flicker, etc.) never occur. When you confirm it, the module should be operated in the same condition as it is installed in your instrument.**

【**Note7**】 **The lamp wire length is +/- mm(from AL back cover surface to connector, not including connector length)**

PDF created with FinePrint pdfFactory Pro trial version www.pdffactory.com

7. Timing characteristics of LCD module input signals

7-1. Timing characteristics

(This is specified at digital outputs of LVDS driver.)

ITEM	Symbol		Min	Typ	Max	Unit	Notes
DCLK	Frequency	F_{CLK}	42	65	82	MHz	
	Period	t_{CLK}	23.81	15.38	12.20	ns	
Hsync	Frequency	f_H	36.21	48.36	60.76	KHz	
	Period	t_{HA}	1160	1344	1720	t_{CLK}	
	Width-Active	t_{HC}	20	136	-	t_{CLK}	
Vsync	Frequency	f_V	46.66	60.00	75.01	Hz	
	Period	t_{VA}	776	806	-	t_{HA}	
	Width-Active	t_{VC}	2	6	-	t_{HA}	
Data Enable	Horizontal back porch	t_{HD}	60	160	-	t_{CLK}	
	Horizontal front porch	t_{HF}	56	24	-	t_{CLK}	
	Horizontal active	t_{HE}	1024	1024	1024	t_{CLK}	
	Horizontal blanking	t_{HB}	136	320	-	t_{CLK}	
	Vertical back porch	t_{VD}	2	29	-	t_{HA}	
	Vertical front porch	t_{VF}	4	3	-	t_{HA}	
	Vertical active	t_{VE}	768	768	768	t_{HA}	
	Vertical blanking	t_{VB}	8	38	-	t_{HA}	

Notes : 1.The performance of electro-optical characteristics may be influenced by variance of the vertical refresh rate.

2. Hsync period will be a double number of character (8).

7-2 Signal Timing Waveform

PDF created with FinePrint pdfFactory Pro trial version www.pdffactory.com

PDF created with FinePrint pdfFactory Pro trial version www.pdffactory.com

8. Input Signals, Basic Display Colors and Gray Scale of Each Color

	Colors & Gray scale	R0 R1 R2 R3 R4 R5 R6 R7	G0 G1 G2 G3 G4 G5 G6 G7	B0 B1 B2 B3 B4 B5 B6 B7
Basic Color	Black	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0
	Blue	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0	1 1 1 1 1 1 1 1
	Green	0 0 0 0 0 0 0 0	1 1 1 1 1 1 1 1	0 0 0 0 0 0 0 0
	Cyan	0 0 0 0 0 0 0 0	1 1 1 1 1 1 1 1	1 1 1 1 1 1 1 1
	Red	1 1 1 1 1 1 1 1	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0
	Magenta	1 1 1 1 1 1 1 1	0 0 0 0 0 0 0 0	1 1 1 1 1 1 1 1
	Yellow	1 1 1 1 1 1 1 1	1 1 1 1 1 1 1 1	0 0 0 0 0 0 0 0
	White	1 1 1 1 1 1 1 1	1 1 1 1 1 1 1 1	1 1 1 1 1 1 1 1
Gray Scale of Red	Black	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0
	⇑	1 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0
	Darker	0 1 0 0 0 0 0 0	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0
	⇑	↓	↓	↓
	⇓	↓	↓	↓
	Bright	1 0 1 1 1 1 1 1	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0
	⇓	0 1 1 1 1 1 1 1	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0
	Red	1 1 1 1 1 1 1 1	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0
Gray Scale of Green	Black	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0
	⇑	0 0 0 0 0 0 0 0	1 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0
	Darker	0 0 0 0 0 0 0 0	0 1 0 0 0 0 0 0	0 0 0 0 0 0 0 0
	⇑			
	⇓			
	Bright	0 0 0 0 0 0 0 0	1 0 1 1 1 1 1 1	0 0 0 0 0 0 0 0
	⇓	0 0 0 0 0 0 0 0	0 1 1 1 1 1 1 1	0 0 0 0 0 0 0 0
	Green	0 0 0 0 0 0 0 0	1 1 1 1 1 1 1 1	0 0 0 0 0 0 0 0
Gray Scale of Blue	Black	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0
	⇑	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0	1 0 0 0 0 0 0 0
	Darker	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0	0 1 0 0 0 0 0 0
	⇑			
	⇓			

PDF created with FinePrint pdfFactory Pro trial version www.pdffactory.com

Bright	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	1	1	1	1	1
⇩	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1
Blue	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1

0 : Low level voltage, 1 : High level voltage

Each basic color can be displayed in 256 gray scales from 8 bit data signals. According to the combination of total 24 bit data signals, the 16.2M-color display can be achieved on the screen.

PDF created with FinePrint pdfFactory Pro trial version www.pdffactory.com

9. Optical Characteristics

Ta=25℃, V_{DD}=+5V

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
Viewing angle range	L/R	$\theta 21, \theta 22$	CR>10	TBD	70		Deg.	【Note1,4】
	U	$\theta 11$		TBD	65		Deg.	
	D	$\theta 12$		TBD	60		Deg.	
Contrast ratio		C R n	$\theta =0°$	450	500	—		【Note2,4】
Response time		τ		—	16		ms	【Note3,4】
Rise time	τ r				TBD		ms	
Fall time	τ d				TBD		ms	
Chromaticity of White (CIE 1931)		Wx		0.259	0.289	0.319		【Note4】
		Wy		0.274	0.304	0.334		
Chromaticity of Red (CIE 1931)		Rx		0.589	0.619	0.649		
		Ry		0.313	0.343	0.373		
Chromaticity of Green (CIE 1931)		Gx		0.268	0.298	0.328		
		Gy		0.548	0.578	0.608		
Chromaticity of Blue (CIE 1931)		Bx		0.119	0.149	0.179		
		By		0.052	0.082	0.112		
Luminance of white 【Note4】		Y_L		TBD	450		Cd/m^2	
White Uniformity		δ w		—	-	1.3		【Note5】

※ **The measurement shall be executed 30 minutes after lighting at rating. (typical condition : I_L = 6.5mArms)**

The optical characteristics shall be measured in a dark room or equivalent state with the method shown in Fig.1 below.

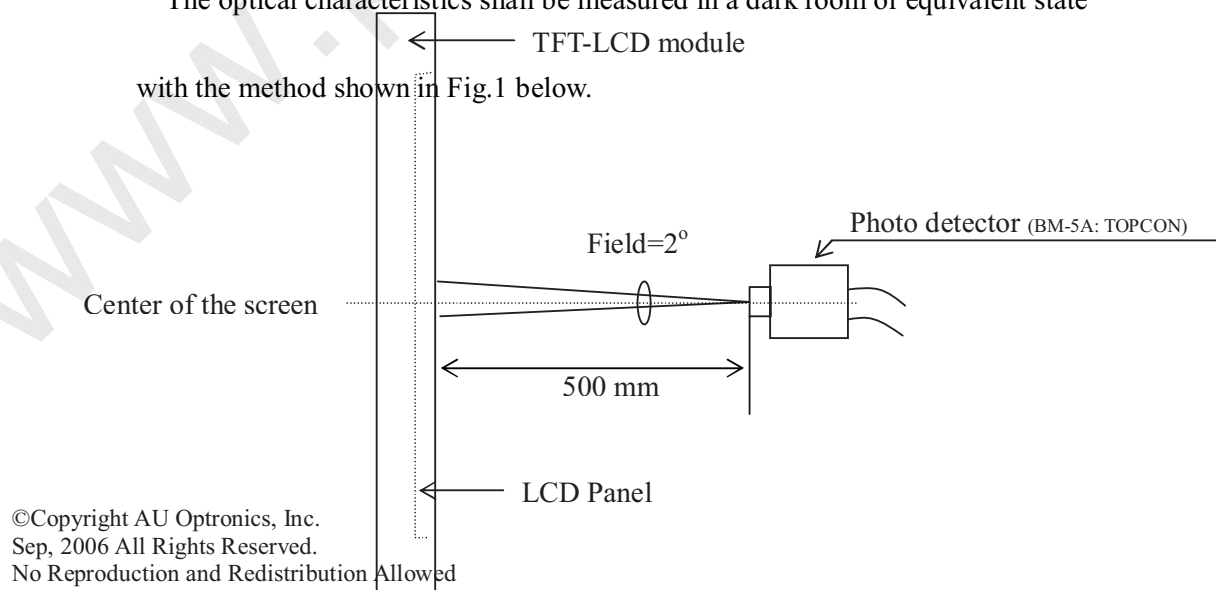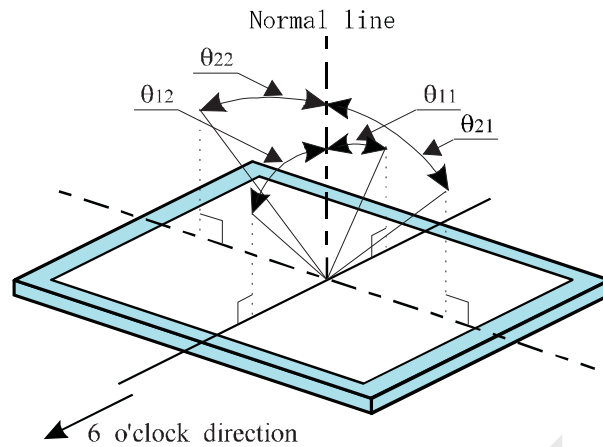**Fig 1. Optical characteristics measurement method**

PDF created with FinePrint pdfFactory Pro trial version www.pdffactory.com

【Note1】 Definitions of viewing angle range:

Normal line

θ22

θ12   θ11

θ21

6 o'clock direction

【**Note2**】 **Definition of contrast ratio:**

The contrast ratio is defined as the following.

$$\text{Contrast Ratio (CR)} = \frac{\text{Luminance (brightness) with all pixels}}{\text{Luminance (brightness) with all pixels}}$$

【**Note3**】 **Definition of response time:**

The response time is defined as the following figure and shall be measured by

**switching the input signal for "black" and "white" .**

White   Black   White

100%
90%

Photodetector Output
(Relative Value)

10%
0%

τ_r τ_d

Time
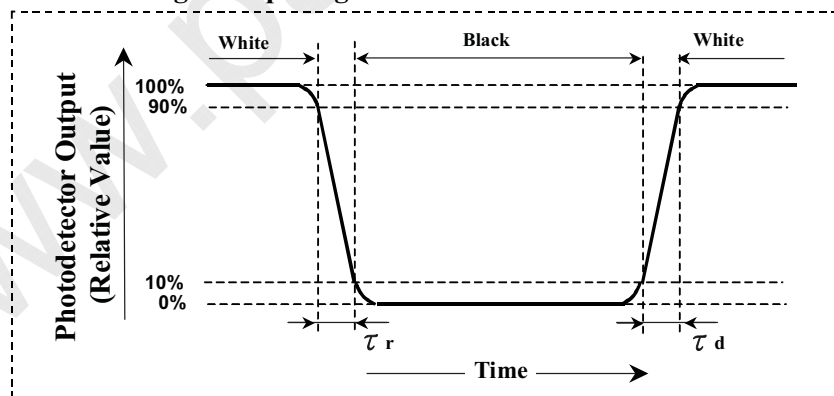
【**Note4**】 **This shall be measured at center of the screen.**

PDF created with FinePrint pdfFactory Pro trial version www.pdffactory.com

【Note5】 Definition of white uniformity:

　　White uniformity is defined as the

　　　following with five measurements

　　　　(A～E).HxV : active area
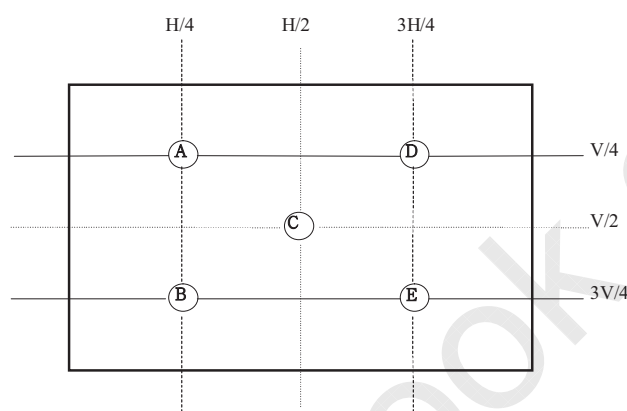
$$\delta_w = \frac{\text{Maximum Luminance (of 5 points measurement)}}{\text{Minnum Luminance (of 5 points measurement)}}$$

PDF created with FinePrint pdfFactory Pro trial version www.pdffactory.com

AUO

10. Display Quality

The display quality of the color TFT-LCD module shall be in compliance with the Incoming Inspection Standard.

11．Handling Precautions

a) Be sure to turn off the power supply when inserting or disconnecting the cable.

b) Be sure to design the cabinet so that the module can be installed without any extra stress such as warp or twist.

c) Since the front polarizer is easily damaged, pay attention not to scratch it.

d) Wipe off water drop immediately. Long contact with water may cause discoloration or spots.

e) When the panel surface is soiled, wipe it with absorbent cotton or other soft cloth.

f) Since the panel is made of glass, it may break or crack if dropped or bumped on hard surface. Handle with care.

g) Since CMOS LSI is used in this module, take care of static electricity and injure the human earth when handling.

h) Observe all other precautionary requirements in handling components.

i) This module has its circuitry PCBs on the rear side and should be handled carefully in order not to be stressed.

j) Laminated film is attached to the module surface to prevent it from being scratched . Peel the film off slowly just before the use with strict attention to electrostatic charges. Ionized air shall be blown over during the action. Blow off the 'dust' on the polarizer by using an ionized nitrogen gun, etc..

k) The LCD Module shall be supplied by power complied to International Standards (IEC60950 or UL60950).

PDF created with FinePrint pdfFactory Pro trial version www.pdffactory.com

12.Reliability test items

The display module must operate error free when operated under the following environmental test condition.

No	Test Item	Condition
1	**High Temperature storage test**	**Ta=60^{0}C 240 hours**
2	**Low Temperature storage test**	**Ta=-20^{0}C 240 hours**
3	**High Temperature operation test**	**Ta=50^{0}C 50%RH 240 hours**
4	**Low Temperature operation test**	**Ta=0^{0}C 240 hours**
5	**Vibration Test (Non-Operating)**	**Waveform: Random Vibration level: 1.0G RMS Bandwidth: 10-500Hz Duration: X,Y,Z, 20 min One time in each direction**
6	**Shock Test (Non-Operating)**	**Shock level: 100G Waveform: half sine wave, 2mS Direction: $\pm$X, $\pm$Y, $\pm$Z One time in each direction**

PDF created with FinePrint pdfFactory Pro trial version www.pdffactory.com

13. Others

1) Adjusting volume has been set optimally before shipment, so do not change any adjusted value.

If adjusted value is changed, the technical literature may not be satisfied.
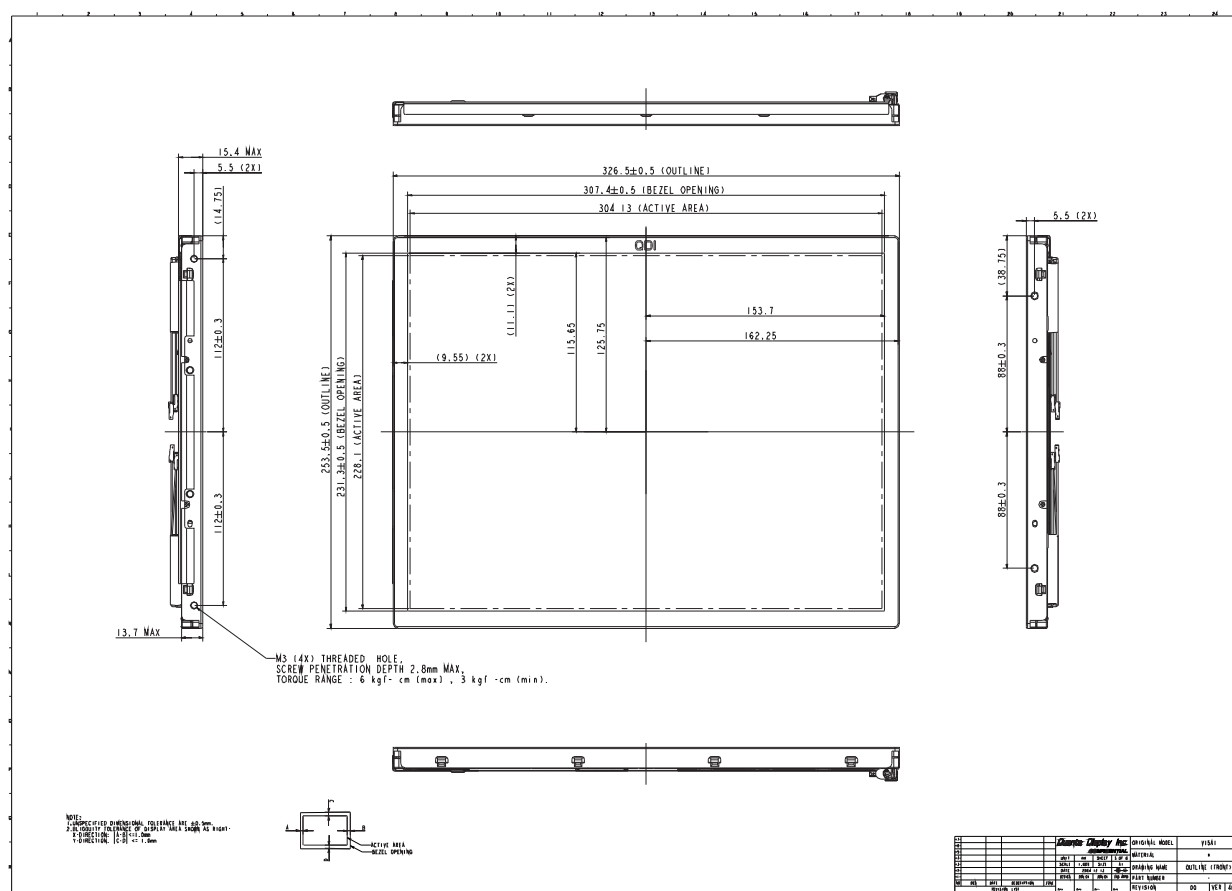
2) Disassembling the module can cause permanent damage and should be strictly avoided.

3) Please be careful since image retention may occur when a fixed pattern is displayed for a long time.

4) If any problem occurs in relation to the description of this specification, it shall be resolved through discussion with spirit of cooperation.
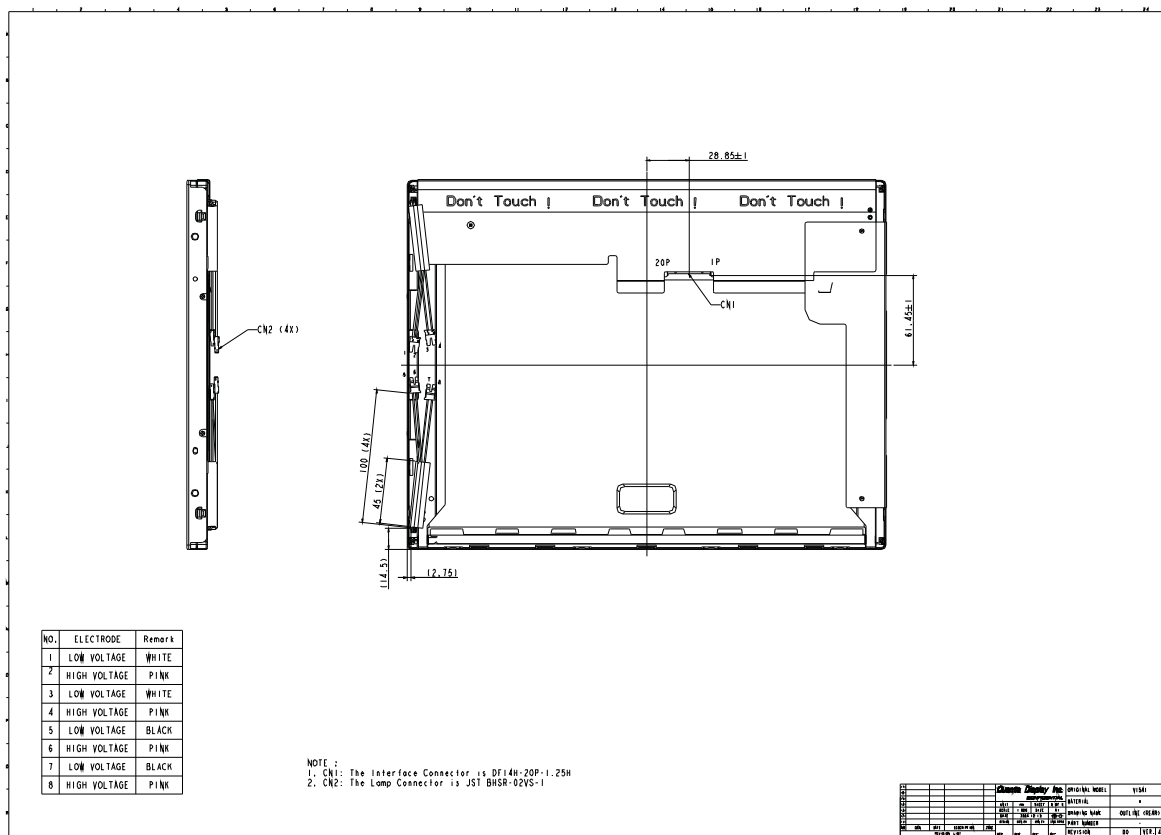
14. Drawing

Front View

Back View

PDF created with FinePrint pdfFactory Pro trial version www.pdffactory.com

NO.	ELECTRODE	Remark
1	LOW VOLTAGE	WHITE
2	HIGH VOLTAGE	PINK
3	LOW VOLTAGE	WHITE
4	HIGH VOLTAGE	PINK
5	LOW VOLTAGE	BLACK
6	HIGH VOLTAGE	PINK
7	LOW VOLTAGE	BLACK
8	HIGH VOLTAGE	PINK

NOTE :
1. CN1: The Interface Connector is DF14H-20P-1.25H
2. CN2: The Lamp Connector is JST BHSR-02VS-1

PDF created with FinePrint pdfFactory Pro trial version www.pdffactory.com